
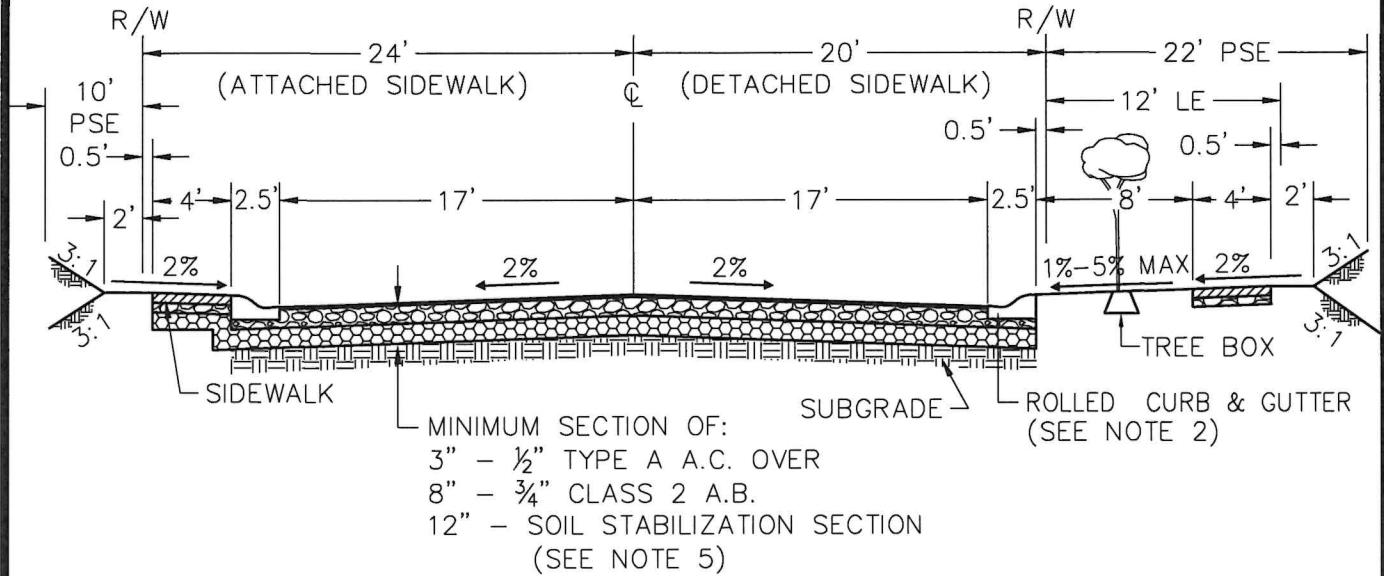


URBAN RESIDENTIAL (LOCAL) ROAD



NOTES:

1. REFER TO SECTION 6 OF YUBA COUNTY STANDARD SPECIFICATIONS FOR ADDITIONAL REQUIREMENTS.
2. VERTICAL CURB REQUIRED AT ALL PARKS, SCHOOLS AND CURB RETURNS OR AS DIRECTED BY PUBLIC WORKS.
3. DESIGN SPEED OF 30 MPH OR AS APPROVED BY PUBLIC WORKS.
4. SOIL STABILIZATION SECTION, A.B. LAYER AND A.C. LAYER SHALL BE COMPACTED TO 95% RELATIVE COMPACTION
5. SOIL STABILIZATION TREATMENT IS REQUIRED ON ALL SUBGRADE WHEN R-VALUE IS 20 OR LESS AND/OR AS RECOMMENDED BY THE GEOTECHNICAL ENGINEER AND AS DIRECTED BY PUBLIC WORKS.
6. IF SOIL STABILIZATION IS REQUIRED, EXTEND TO BACK OF WALK FOR ATTACHED SIDEWALK.
7. IN ALL CASES, THE MIN. ALLOWABLE STRUCTURAL PAVEMENT SECTION SHALL BE 3" OF HMA AND 8" OF AB.
8. 20 TON MIN. PROOF ROLL REQUIRED ON SUBGRADE AND AGGREGATE BASE PRIOR TO PAVING.

| | |
|--|---------------|
| YUBA COUNTY DEPARTMENT OF PUBLIC WORKS | |
| URBAN RESIDENTIAL (LOCAL) ROAD | |
|  APPROVED BY: | DATE: 8/11/22 |
| 101 | |